SUBMITTAL

Part Number:

Temperature Sensor c/w Mounting Clip


PRODUCT SELECTION INFORMATION:

MODEL	Product D	escription	
TE200HC	C Stainless S	Stainless Steel Surface Temperature Sensor	
	CODE	Sensor	
	2 5 6 7 8 9 12 13 14 15 20 24	PT100-100 Ω Plat. IEC 751, 385 Alpha, thin film 1801 Ω, NTC Thermistor, ± 0.2 C 3000 Ω, NTC Thermistor, ± 0.2 C 10,000 Ω, type 3, NTC Thermistor, ± 0.2 C 2.252K Ω, NTC Thermistor, ± 0.2 C 100,000 Ω, NTC Thermistor, ± 0.2 C PT1000-1000 Ω Platinum, IEC 751, 385 Alpha, thin film 1000 Ω Nickel 10,000 Ω, type 3, NTC Thermistor, ± 0.2 C c/w 11K shunt resistor PT3000 PTC Platinum, ± 0.2 C 20,000 Ω, NTC Thermistor, ± 0.2 C 10,000 Ω, type 2, NTC Thermistor, ± 0.2 C	
Ļ	Ļ		
TE200H	IC 7		

TE200HC

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

EXAMPLE: 10K Thermistor, 6" pigtail c/w mounting clip

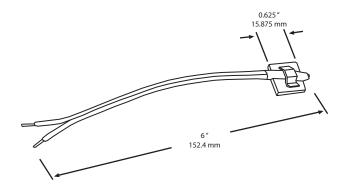

The TE200HC series incorporates a precision temperature sensor used to monitor temperatures in a variety of applications. It comes with a self-adhesive mounting clip which can be secured to almost any surface.

Operating Temperature Range	-20° to 105 °C (-4° to 221 °F)	
Mounting	Selfadhesive	
Wire Type	PVC - 22 AWG	
Wiring Connections	Pig Tail (Number of wires depends on sensor)	
Temperature Curve	For temperature vs. resistance charts, please visit Greystone's website: www.greystoneenergy.com	

Installation:

For complete installation and wiring details, please refer to the product installation instructions.

The TE200HC series can be mounted directly to any surface using the self-adhesive mounting clip supplied.

A pigtail is used for connection to the Building Automation System.



Greystone Energy Systems, Inc. 150 English Drive, Moncton, NB Canada E1E 4G7

(506) 853-3057 Fax: (506) 853-6014 North America: 1-800-561-5611 e-mail: mail@greystoneenergy.com www.greystoneenergy.com

