

SUBMITTAL

Part Number:

Strap-on Temperature Transmitter

PRODUCT SELECTION INFORMATION:

MODEL	Product Description
TE511E	Strap-on Temperature Transmitter c/w LCD display °C
TE512E	Strap-on Temperature Transmitter c/w LCD display °F

CODE	Enclosure (ABS enclosure is standard)
-	ABS enclosure, standard (no code required, leave blank)
W	PVC weatherproof box

CODE	Secondary Sensor (Leave blank if not required)
2	PT100-100 Ω Plat. IEC 751, 385 Alpha, thin film
5	1801 Ω, NTC Thermistor, ±0.2°C
6	3000 Ω, NTC Thermistor, ±0.2°C
7	10,000 Ω, Type 3, NTC Thermistor, ±0.2°C
8	2.252 KΩ, NTC Thermistor, ±0.2°C
9	100,000 Ω, NTC Thermistor, ±0.2°C
12	PT1000-1000 Ω Platinum, IEC 751, 385 Alpha, thin film
13	1000 Ω Nickel
14	10,000 Ω, Type 3, NTC Thermistor, ±0.2°C c/w 11K shunt resistor
15	PT3000 PTC Platinum, ±0.2°C
20	20,000 Ω, NTC Thermistor, ±0.2°C
24	10,000 Ω, Type 2, NTC Thermistor, ±0.2°C

CODE	Probe Length
A	50 mm (2")
B	100 mm (4")
C	150 mm (6")
D	200 mm (8")
E	300 mm (12")
F	450 mm (18")

CODE	Probe Material
2	304 Stainless steel

CODE	Transmitter Output Signal
A	Current 4-20mA
D	Voltage 0-5 Vdc
E	Voltage 0-10 Vdc

CODE	Transmitter Range
1	0 - 35°C (32 - 95°F)
2	0 - 50°C (32 - 122°F)
3	0 - 100°C (32 - 212°F)
*	Custom range, please contact Greystone

TE511E	-	-	A	2	1A	2
--------	---	---	---	---	----	---

Greystone Energy Systems, Inc. reserves the right to make design modifications without prior notice.

EXAMPLE: Strap-on c/w °C LCD, 2" S/S, 4-20mA. 0-50°C

*Custom Range:

The TE511/512E single point strap-on temperature transmitter incorporates a precision platinum RTD encapsulated in a 6.35 mm (0.25") OD, 304 stainless steel probe and is available in various lengths (see ordering chart). All probes provide excellent heat transfer, fast response and resist moisture penetration. A transmitter that provides a high accuracy signal with excellent long term stability, low hysteresis and fast response for measurement of pipe temperatures. A LCD is provided in either °C (511) or °F (512). A secondary sensor option is available.

Sensor Operating Temperature Range	-20 to 105 °C (-4 to 221 °F) Higher ranges available, please contact Greystone
Enclosure	Standard - ABS - UL94-V - NEMA 1 (IP23) Weatherproof (W) - PVC - NEMA 4X (IP66)
Cable	PVC insulated, parallel bonded (100 ohm - Type 2 uses FT-4)
Probe	304 Series stainless steel with spin welded tip
Output Signal	Current: 4-20 mA current loop Voltage: 0-5 or 0-10 Vdc (Factory Configured)
Transmitter Accuracy	±0.1% of span, including linearity
Power Supply	Current: 15-35 Vdc or 22-32 Vac Voltage: 0-5 Vdc: 10-35 Vdc or 10-32 Vac 0-10 Vdc: 15-35 Vdc or 15-32 Vac
Power Consumption	Current: 22.5 mA Max. (Occurs with open sensor) Voltage: 5 mA nominal
PCB Operating Temperature	0° to 70°C (32° to 158°F)
Wiring Connections	Two or three wires Screw terminal block (14 to 22 AWG)
Display Units	°C (511) or °F (512) - Factory set
Display Range	0° to 100°C typical range for transmitter
Display Resolution	0.1°C or 0.1°F for display of 00.0 to 99.9
Display Accuracy	±0.2°C or ±0.2°F over full range
Display Update Rate	3 times per second
Display Size	24 mm W x 11 mm H (0.95" x 0.45") three digit

Installation:

For complete installation and wiring details, please refer to the product installation instructions.

For best results, thermal conductive compound should be applied to pipe prior to mounting the probe.

Find a suitable location along the pipe where both the probe and remote enclosure can be mounted. If necessary, remove a section of insulation from pipe. Position probe directly on the pipe and secure using a pipe clamp. For added security, make 1-3 loops of the sensor cable around the pipe and feed through wire hole on the enclosure and secure using the supplied grommet. If necessary, the pipe insulation can be re-applied to the pipe over the probe.



GREYSTONE

ACCURACY BY DESIGN

Greystone Energy Systems, Inc.
150 English Drive, Moncton, NB
Canada E1E 4G7


(506) 853-3057 Fax: (506) 853-6014
North America: 1-800-561-5611
e-mail: mail@greystoneenergy.com
www.greystoneenergy.com

RoHS
COMPLIANT









Typical Installation:

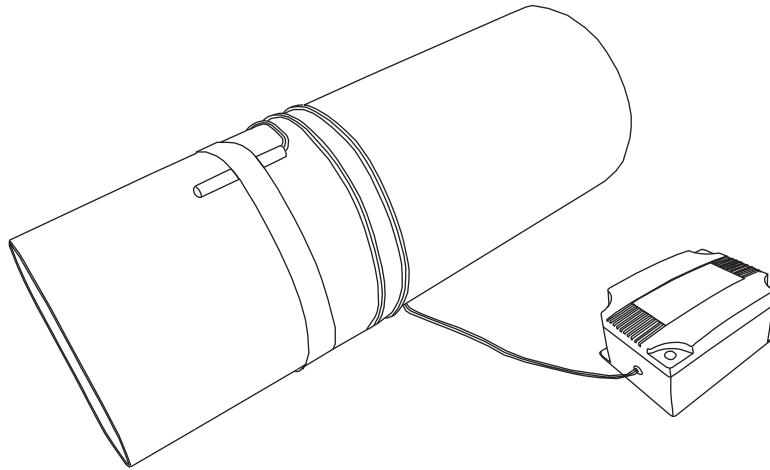

Dimensions:

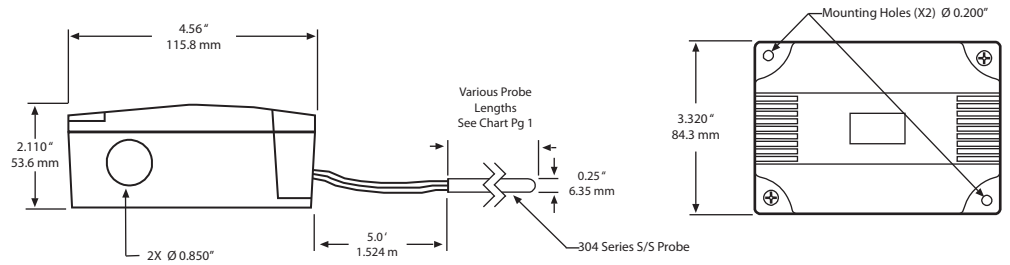

ABS Enclosure

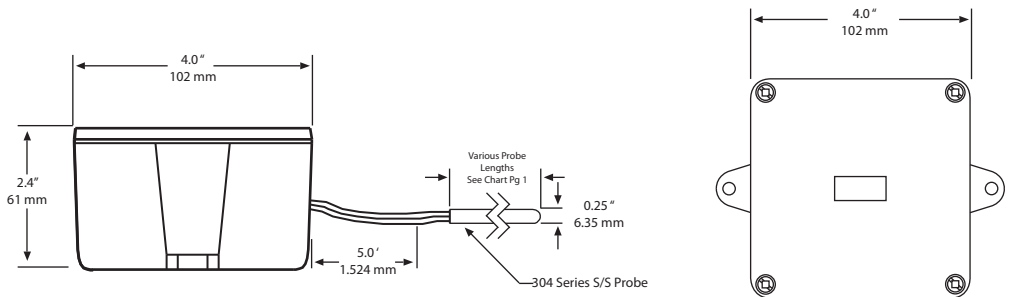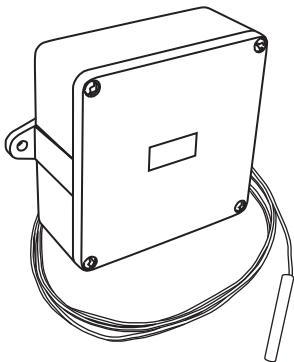

Weatherproof Enclosure